




MODIFIED CHEROKEE GOLD


8/8 ORIGINAL CLASSIC D SHAPE

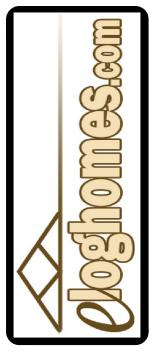


BY | DATE LJM 12-28-202

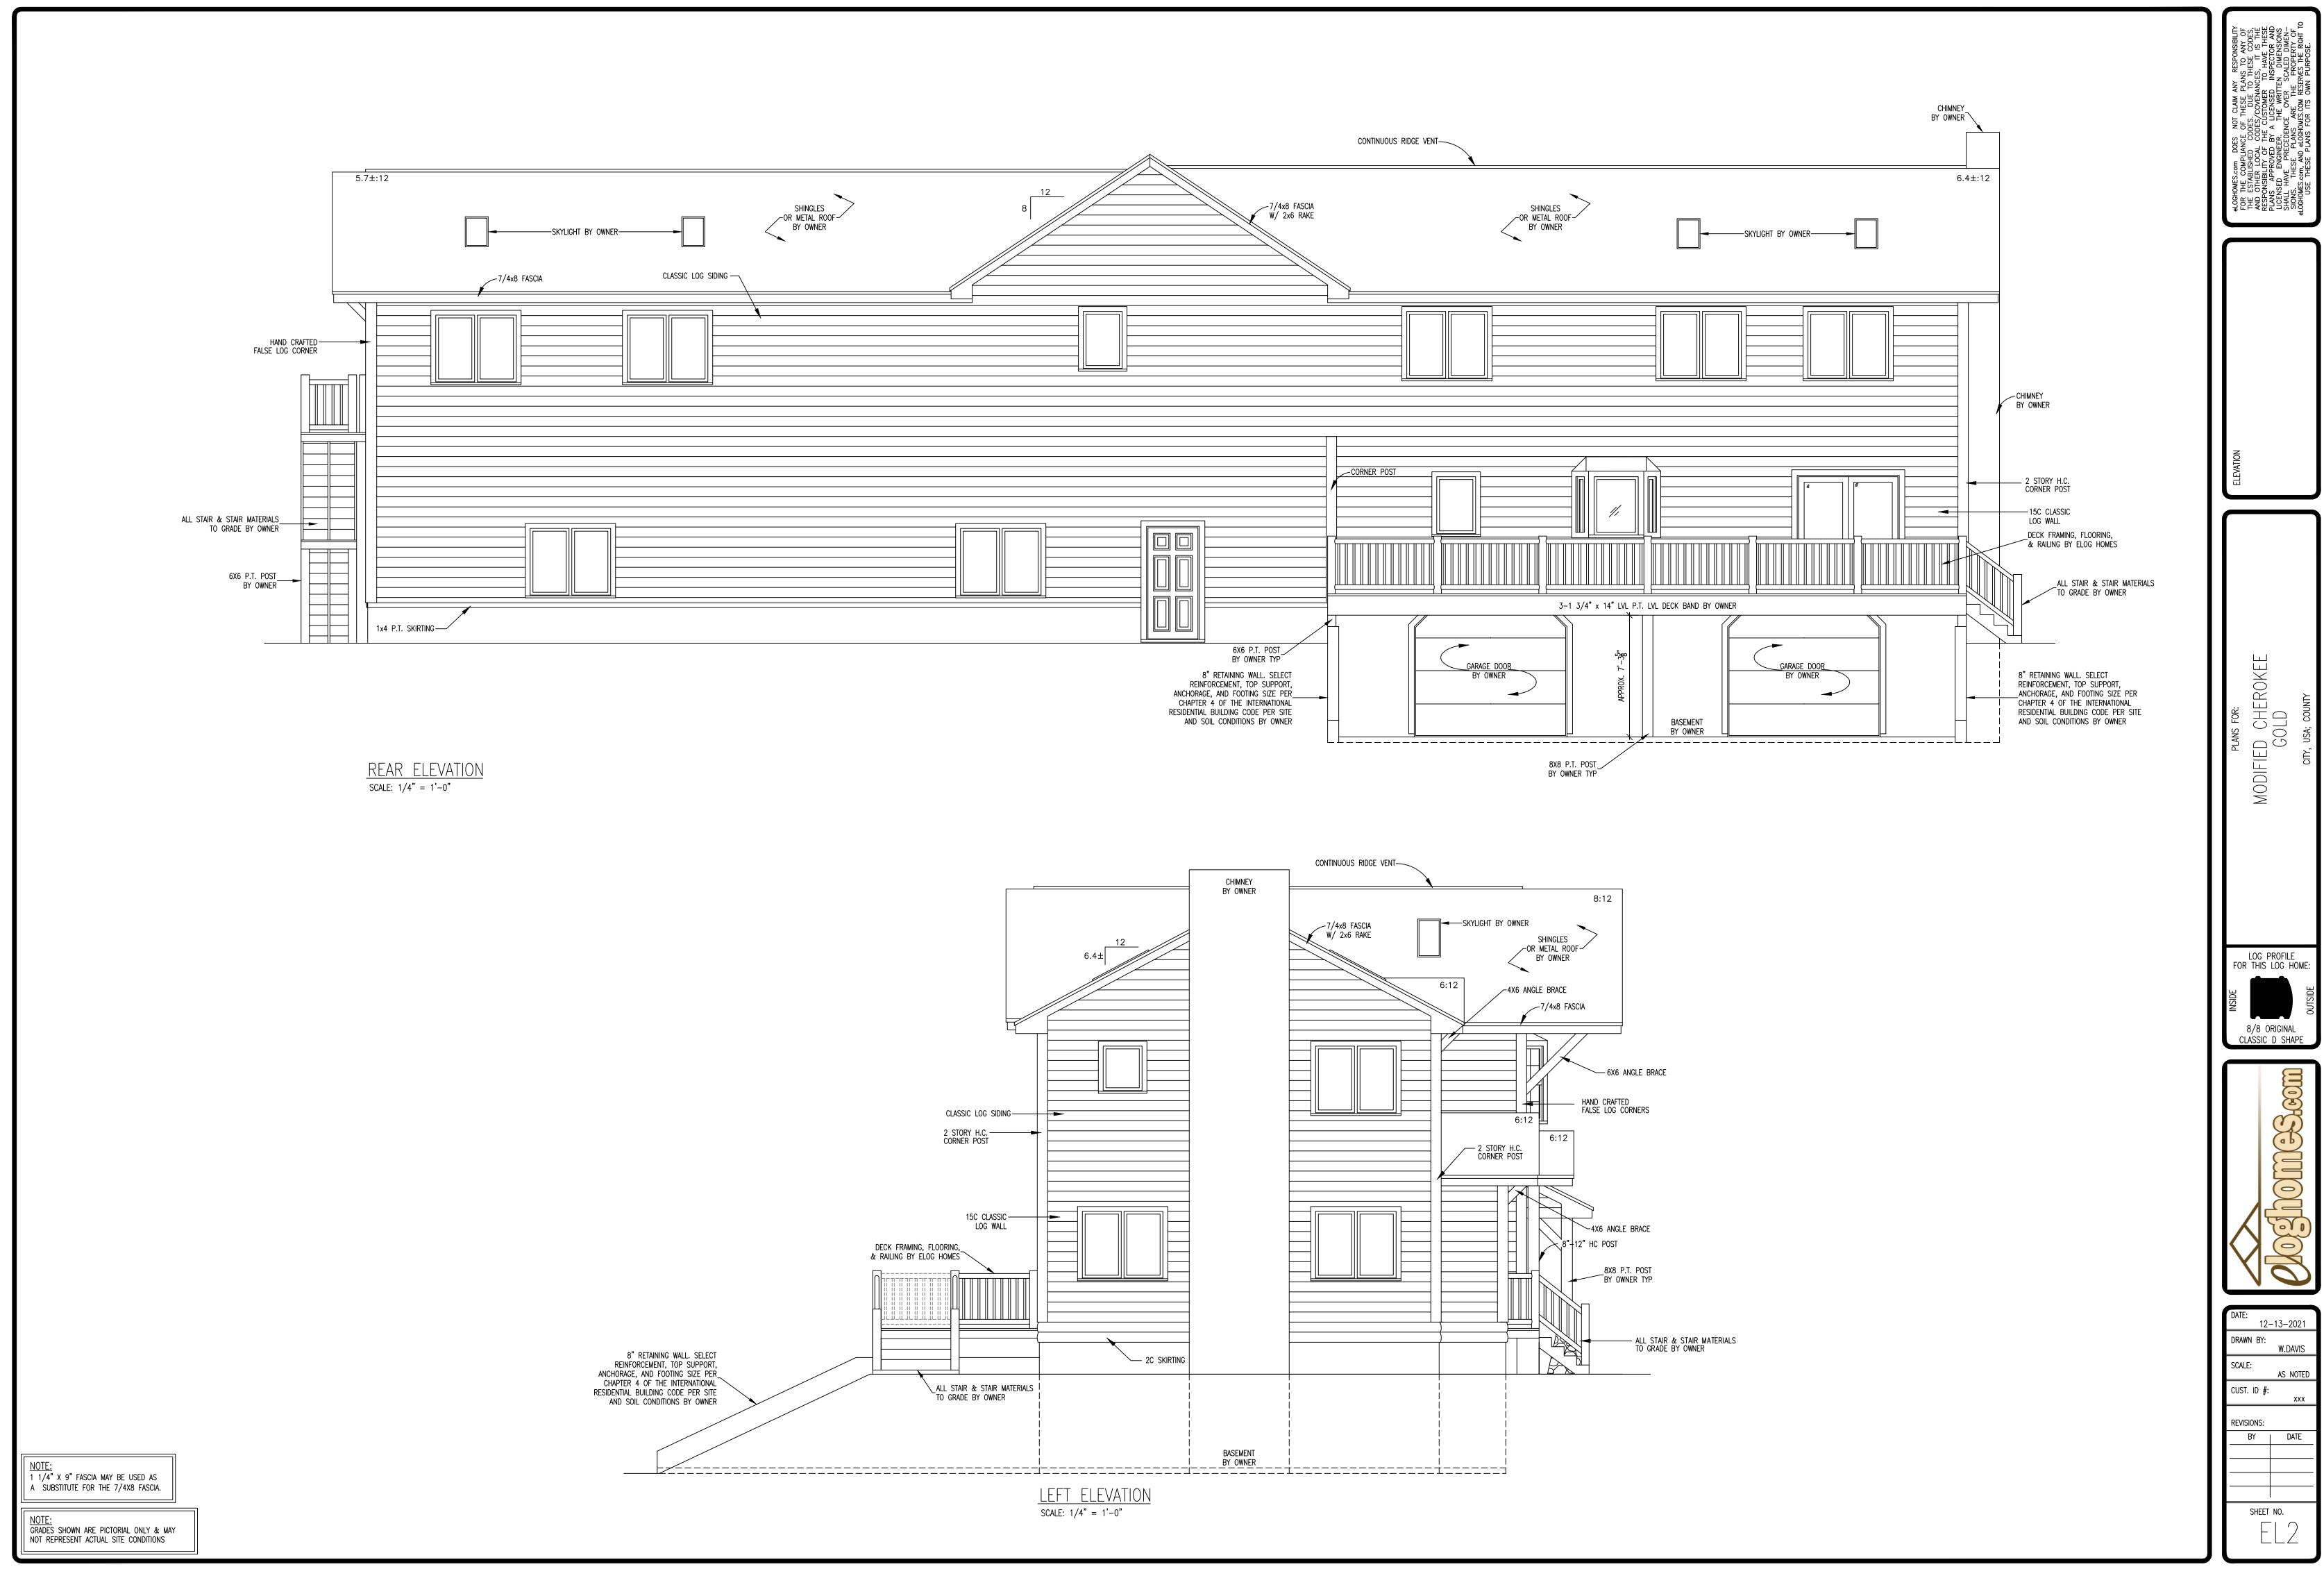

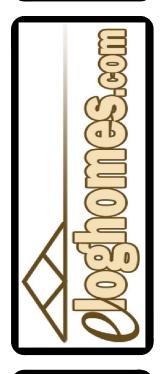

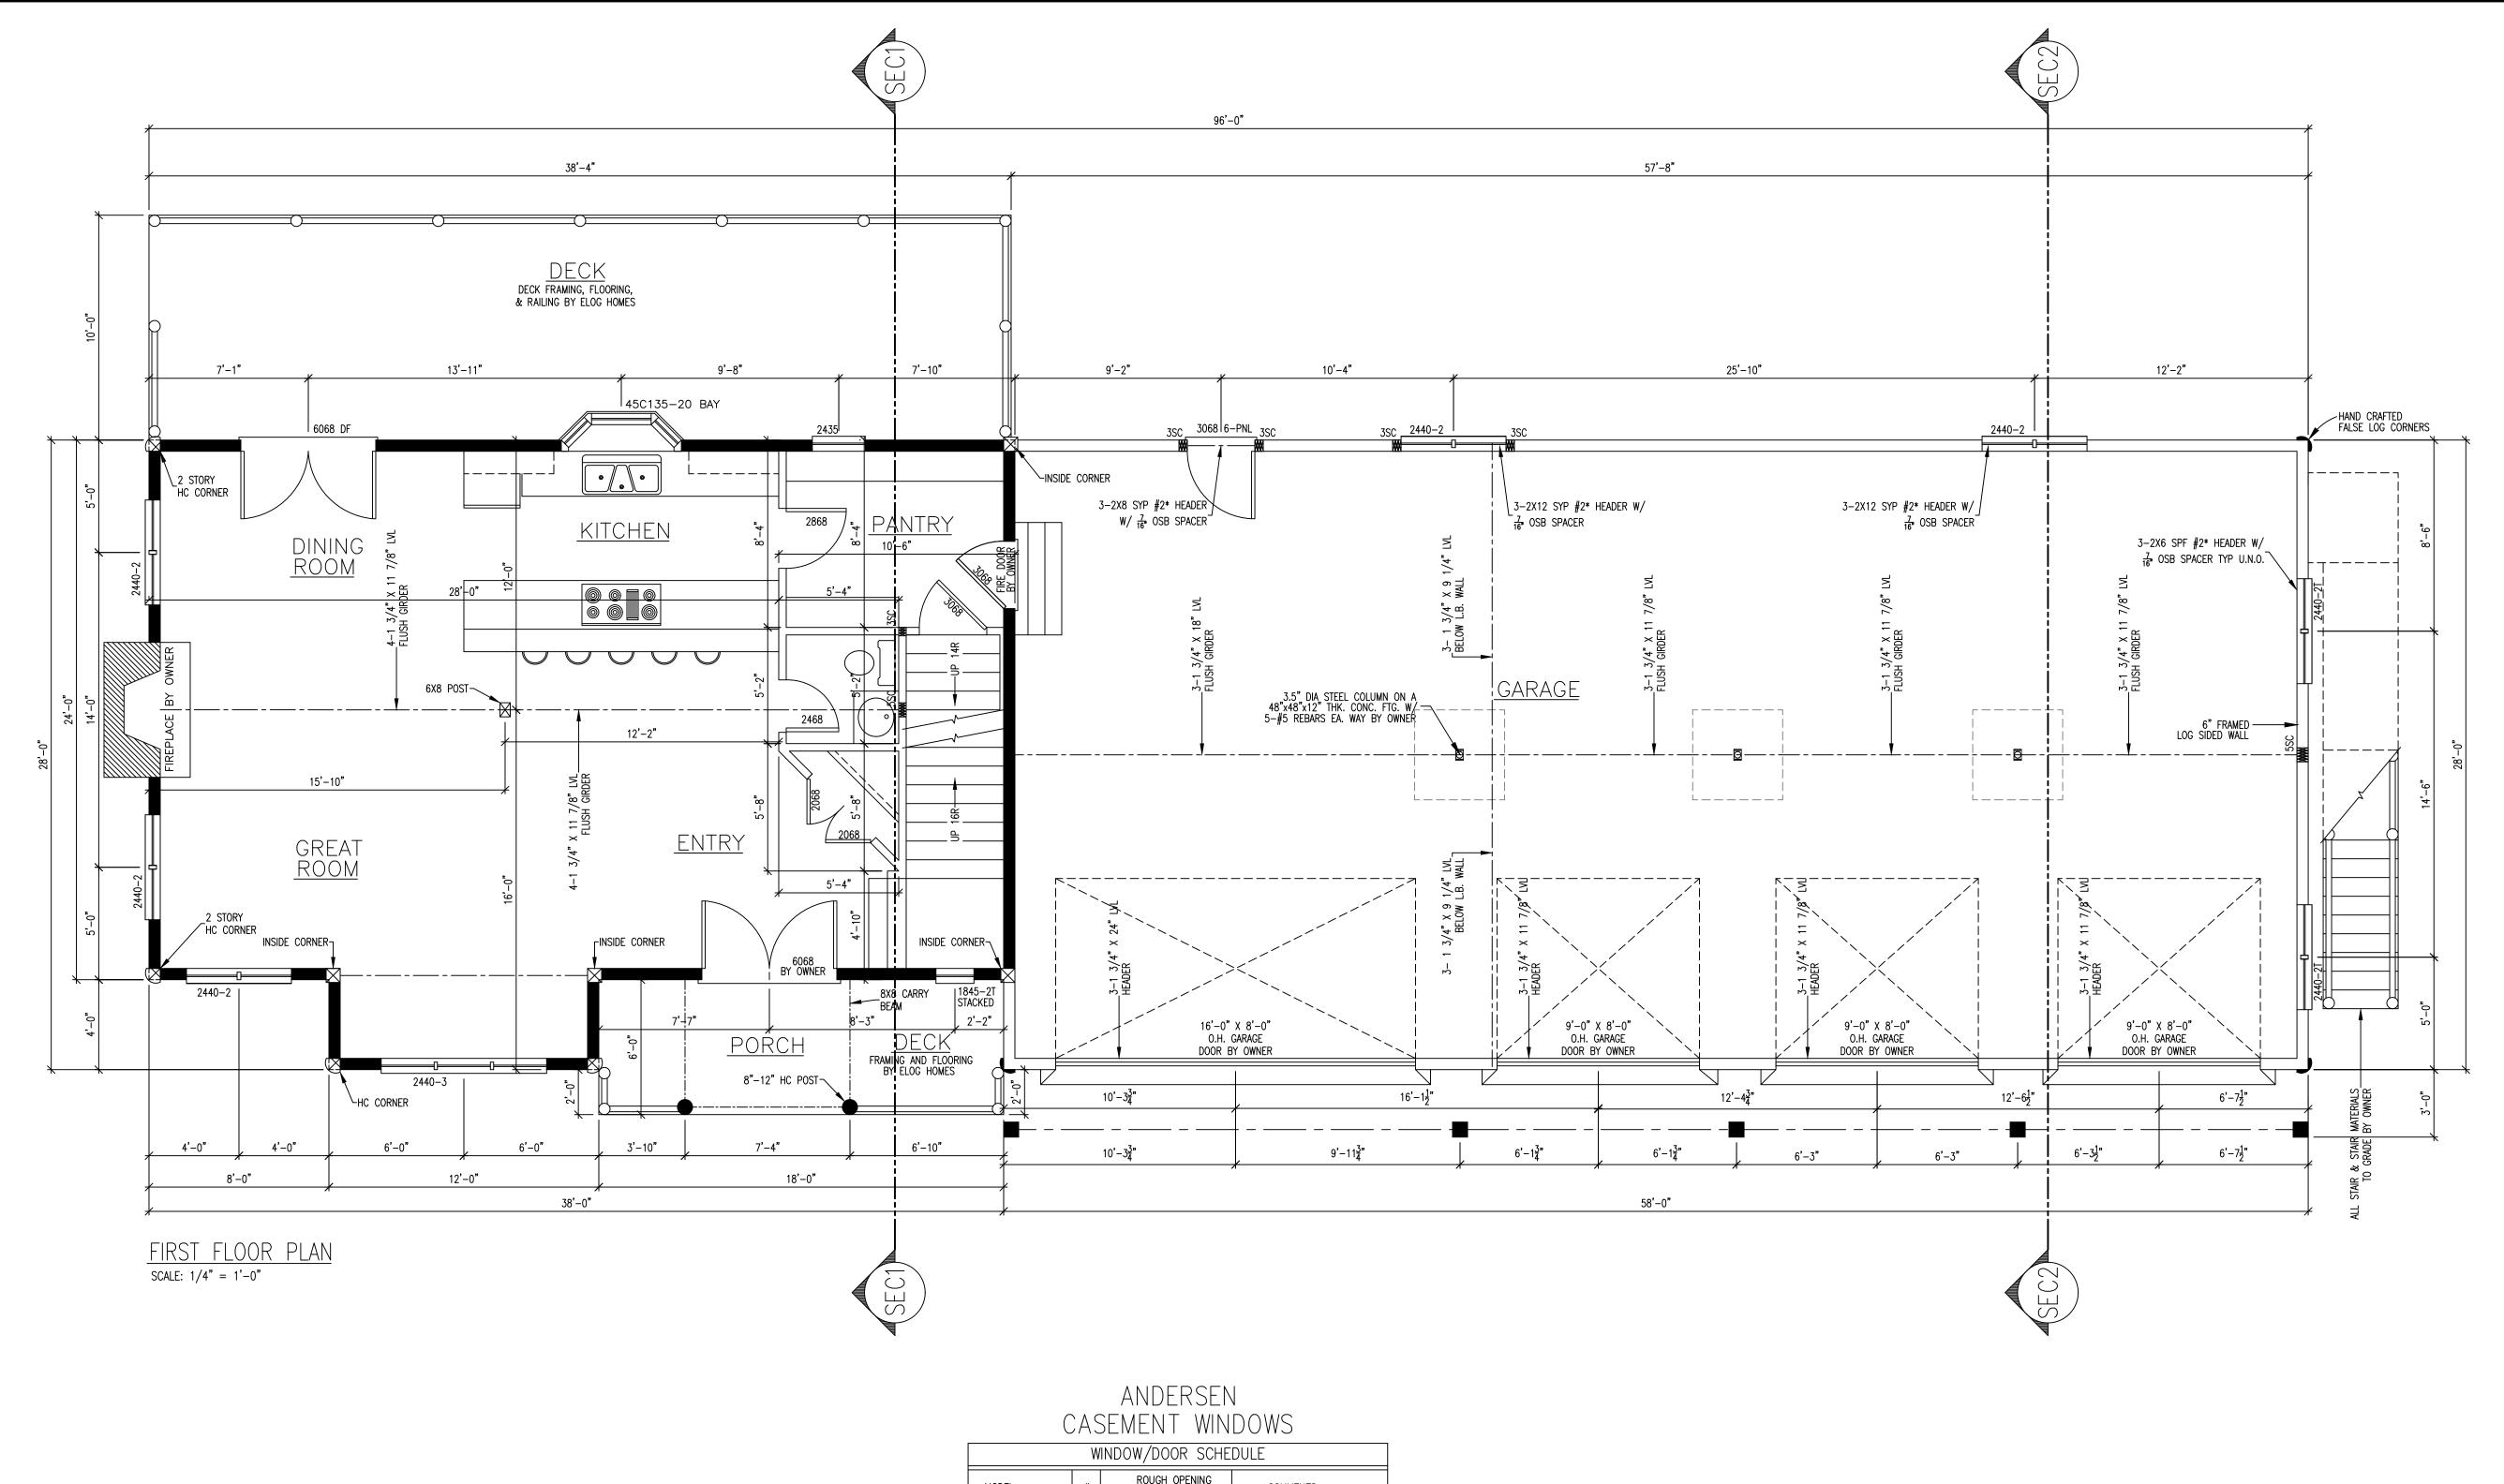

WINDOW/DOOR SCHEDULE					
MODEL	#	ROUGH OPENING WIDTH x HEIGHT	COMMENTS		
1845-2T	1	1'-9 1/2" x 4'-5 15/16"	SINGLE CASEMENT, STACKED		
2435 (CW135)	1	2'-4 7/8" x 3'-5 3/8"	SINGLE CASEMENT		
2435T (CW135)	2	2'-4 7/8" x 3'-5 3/8"	SINGLE CASEMENT, TEMPERED		
2440 (CW14)	4	2'-4 7/8" x 4'-0 1/2"	SINGLE CASEMENT		
2440-2 (CW24)	13	4'-9" x 4'-0 1/2"	TWIN CASEMENT		
2440-2T (CW24)	4	4'-9" x 4'-0 1/2"	TWIN CASEMENT, TEMPERED		
2440-3	1	7'-1 1/8" x 4'-0 1/2"	TRIPLE CASEMENT		
45C135-20 BAY	1	5'-2 5/8" x 3'-6 7/8"	BAY		
45C14-20 BAY	1	5'-2 5/8" x 4'-2"	BAY		
DOORS					
3068 6PNL	1	3'-2" x 6'-10 1/2"	6 PANEL		
3068 SF	1	3'-1" x 6'-11"	SINGLE FRENCH ENTRY		
6068 DF	1	6'-0" x 6'-11"	DOUBLE FRENCH ENTRY		

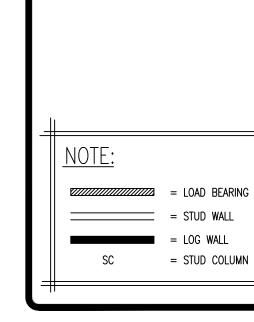


eLOGHOMES.com DOES NOT CLAIM ANY RESPONSIBILITY FOR THE COMPLIANCE OF THESE PLANS TO ANY OF THE ESTABLISHED CODES. DUE TO THESE CODES, AND OTHER THE CODES/COVENANCES, IT IS THE RESPONSIBILITY OF THE CUSTOMER TO HAVE THESE PLANS APPROVED BY A LICENSED INSPECTOR AND LICENSED ENGINEER. THE WRITTEN DIMENSIONS SHALL HESE PLANS ARE THE PROPERTY OF ELOGHOMES.com, AND eLOGHOMES.COM RESERVES THE RIGHT USE THESE PLANS FOR ITS OWN PURPOSE.

972 SQ. FEET 1585 SQ. FEET 950 SQ. FEET 3507 SQ. FEET 108 SQ. FEET 383 SQ. FEET 1612 SQ. FEET


> SECOND FLOOR PLAN BONUS ROOM PLAN TOTAL PORCH DECK GARAGE

MODIFIED CHEROKEE GOLD



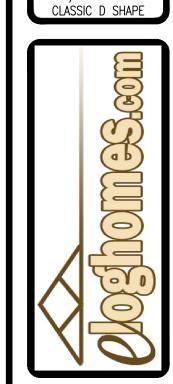

V	9
DATE: 12-	-13-2021
DRAWN BY:	W.DAVIS
SCALE:	as noted
CUST. ID #:	xxx
REVISIONS:	
BY	DATE

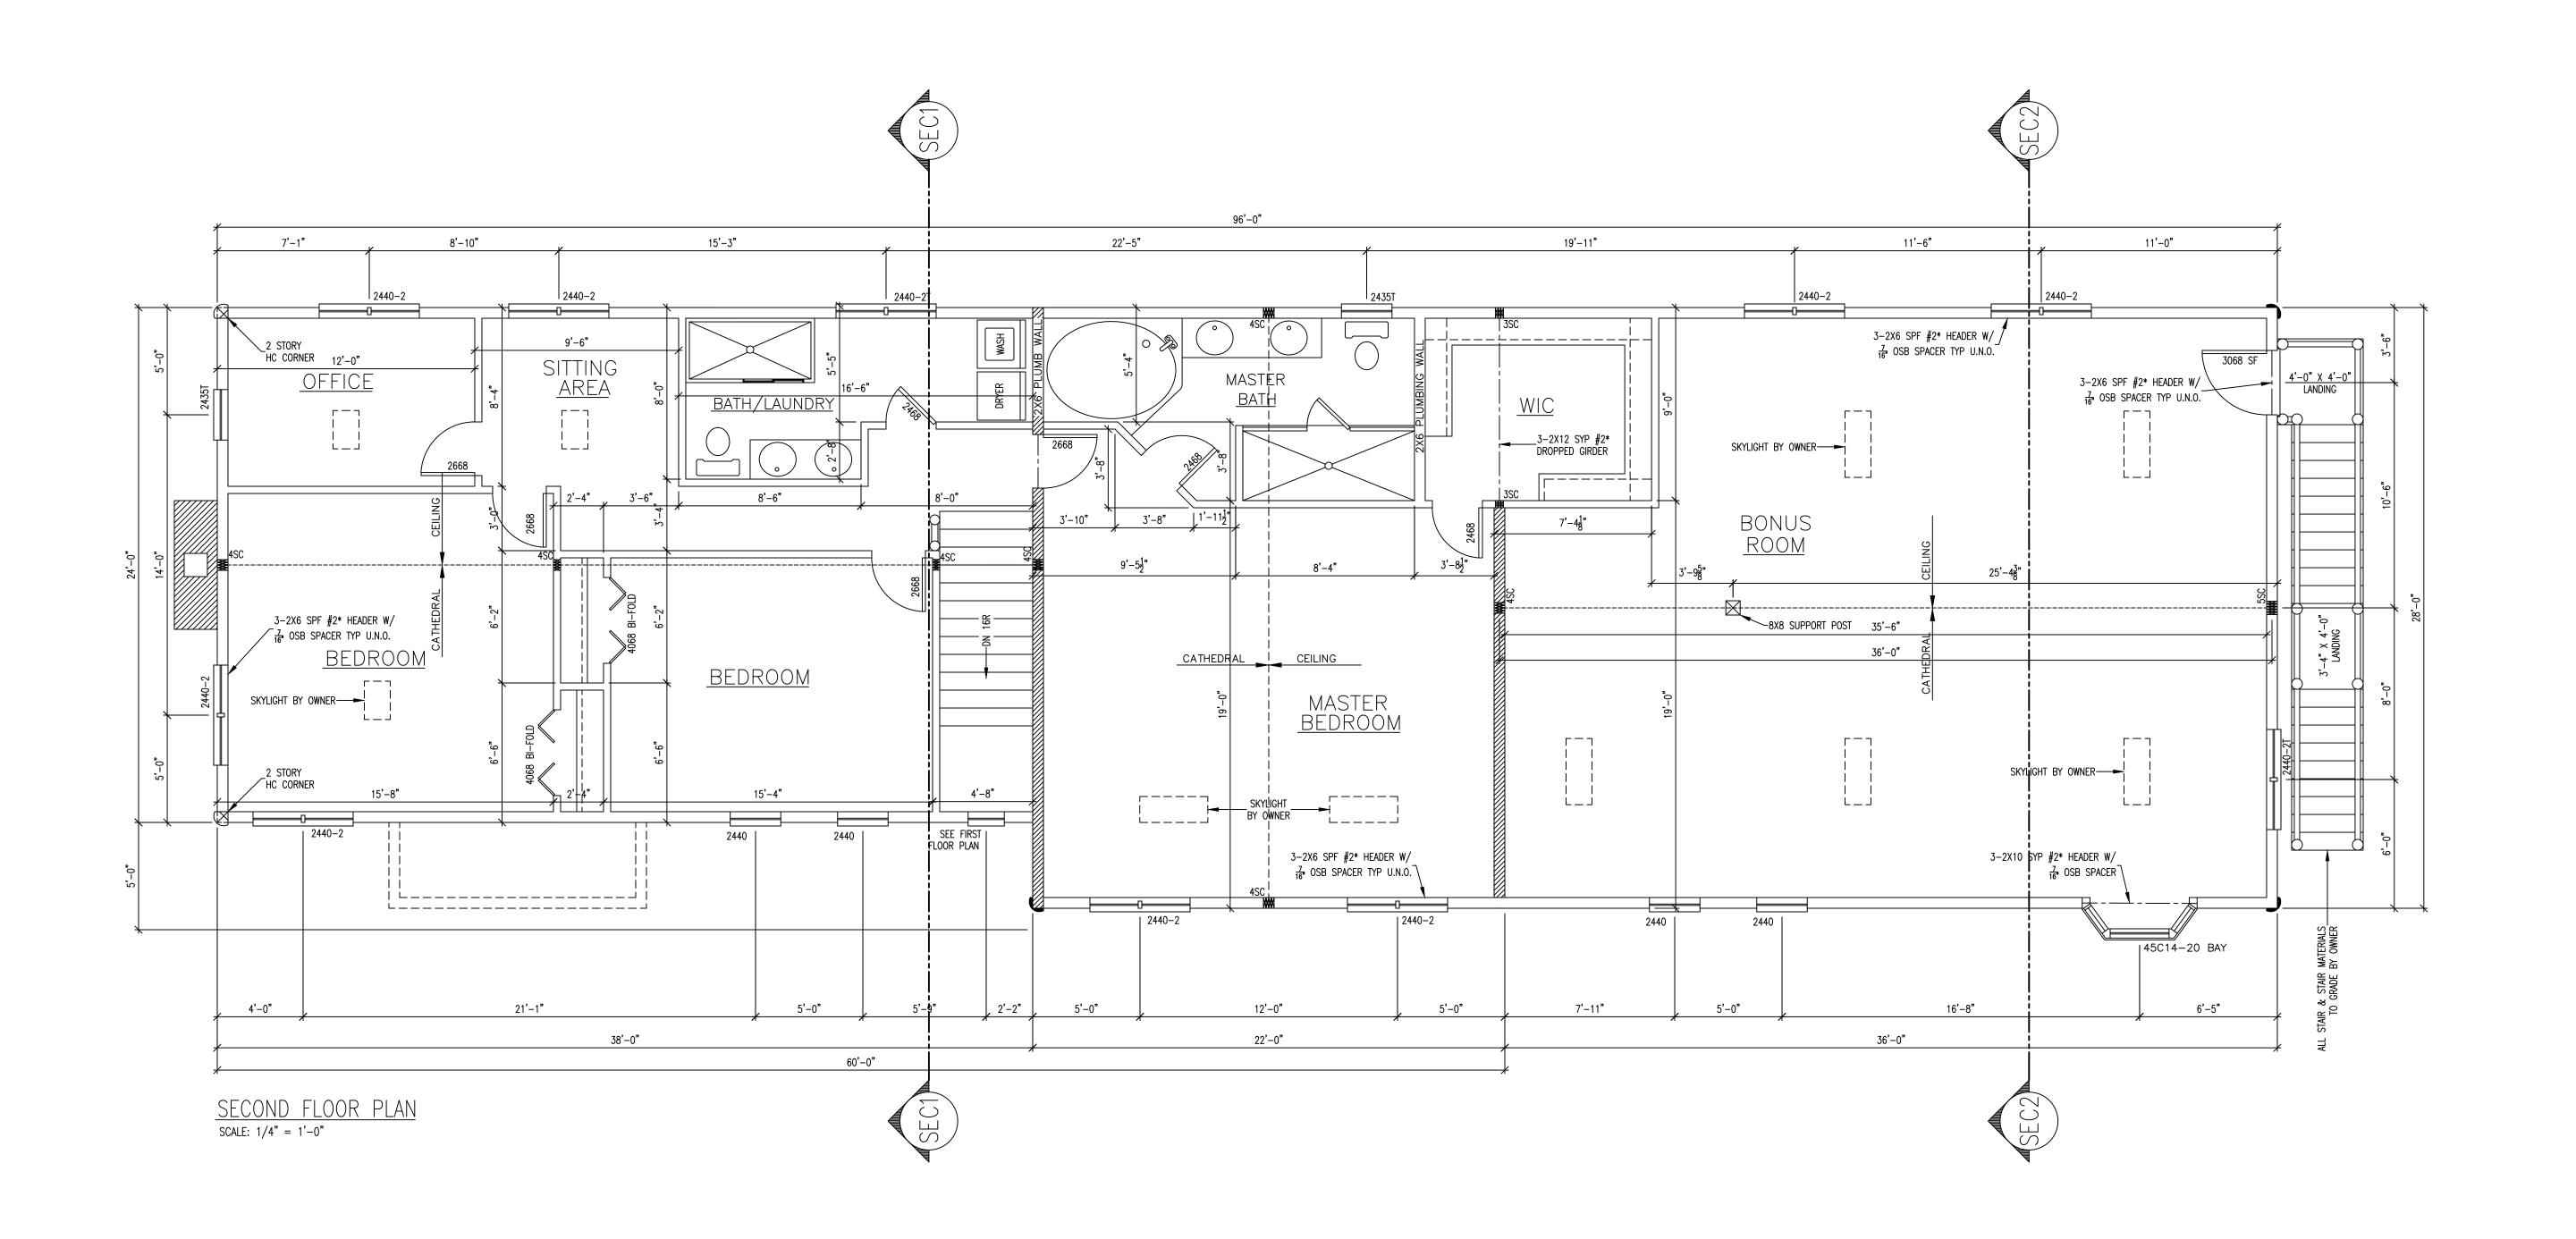


eLOGHOMES.com DOES NOT CLAIM ANY RESPONSIBILITY FOR THE COMPLIANCE OF THESE PLANS TO ANY OF THE ESTABLISHED CODES. DUE TO THESE CODES, AND OTHER LOCAL CODES, COVENANCES, IT IS THE RESPONSIBILITY OF THE CUSTOMER TO HAVE THESE PLANS APPROVED BY A LICENSED INSPECTOR AND LICENSED ENGINEER. THE WRITTEN DIMENSIONS SHALL HAVE PRECEDENCE OVER SCALED DIMENSIONS. THESE PLANS ARE THE PROPERTY OF ELOCHOMES.com, AND eLOGHOMES.COM RESERVES THE RIGHT USE THESE PLANS FOR ITS OWN PURPOSE.

SECOND FLOOR


MODIFIED CHEROKEE
GOLD


LOG PROFILE
FOR THIS LOG HOME:

30|SU|
8/8 ORIGINAL
CLASSIC D SHAPE

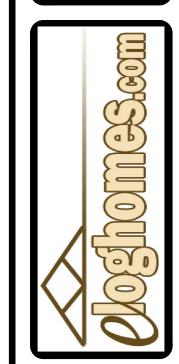

DATE:	47 0004				
12-13-2021					
DRAWN BY:					
	W.DAVIS				
SCALE:					
	AS NOTED				
CUST. ID #:					
	xxx				
	-				
REVISIONS:					
BY	DATE				
-					
OUEST NO					

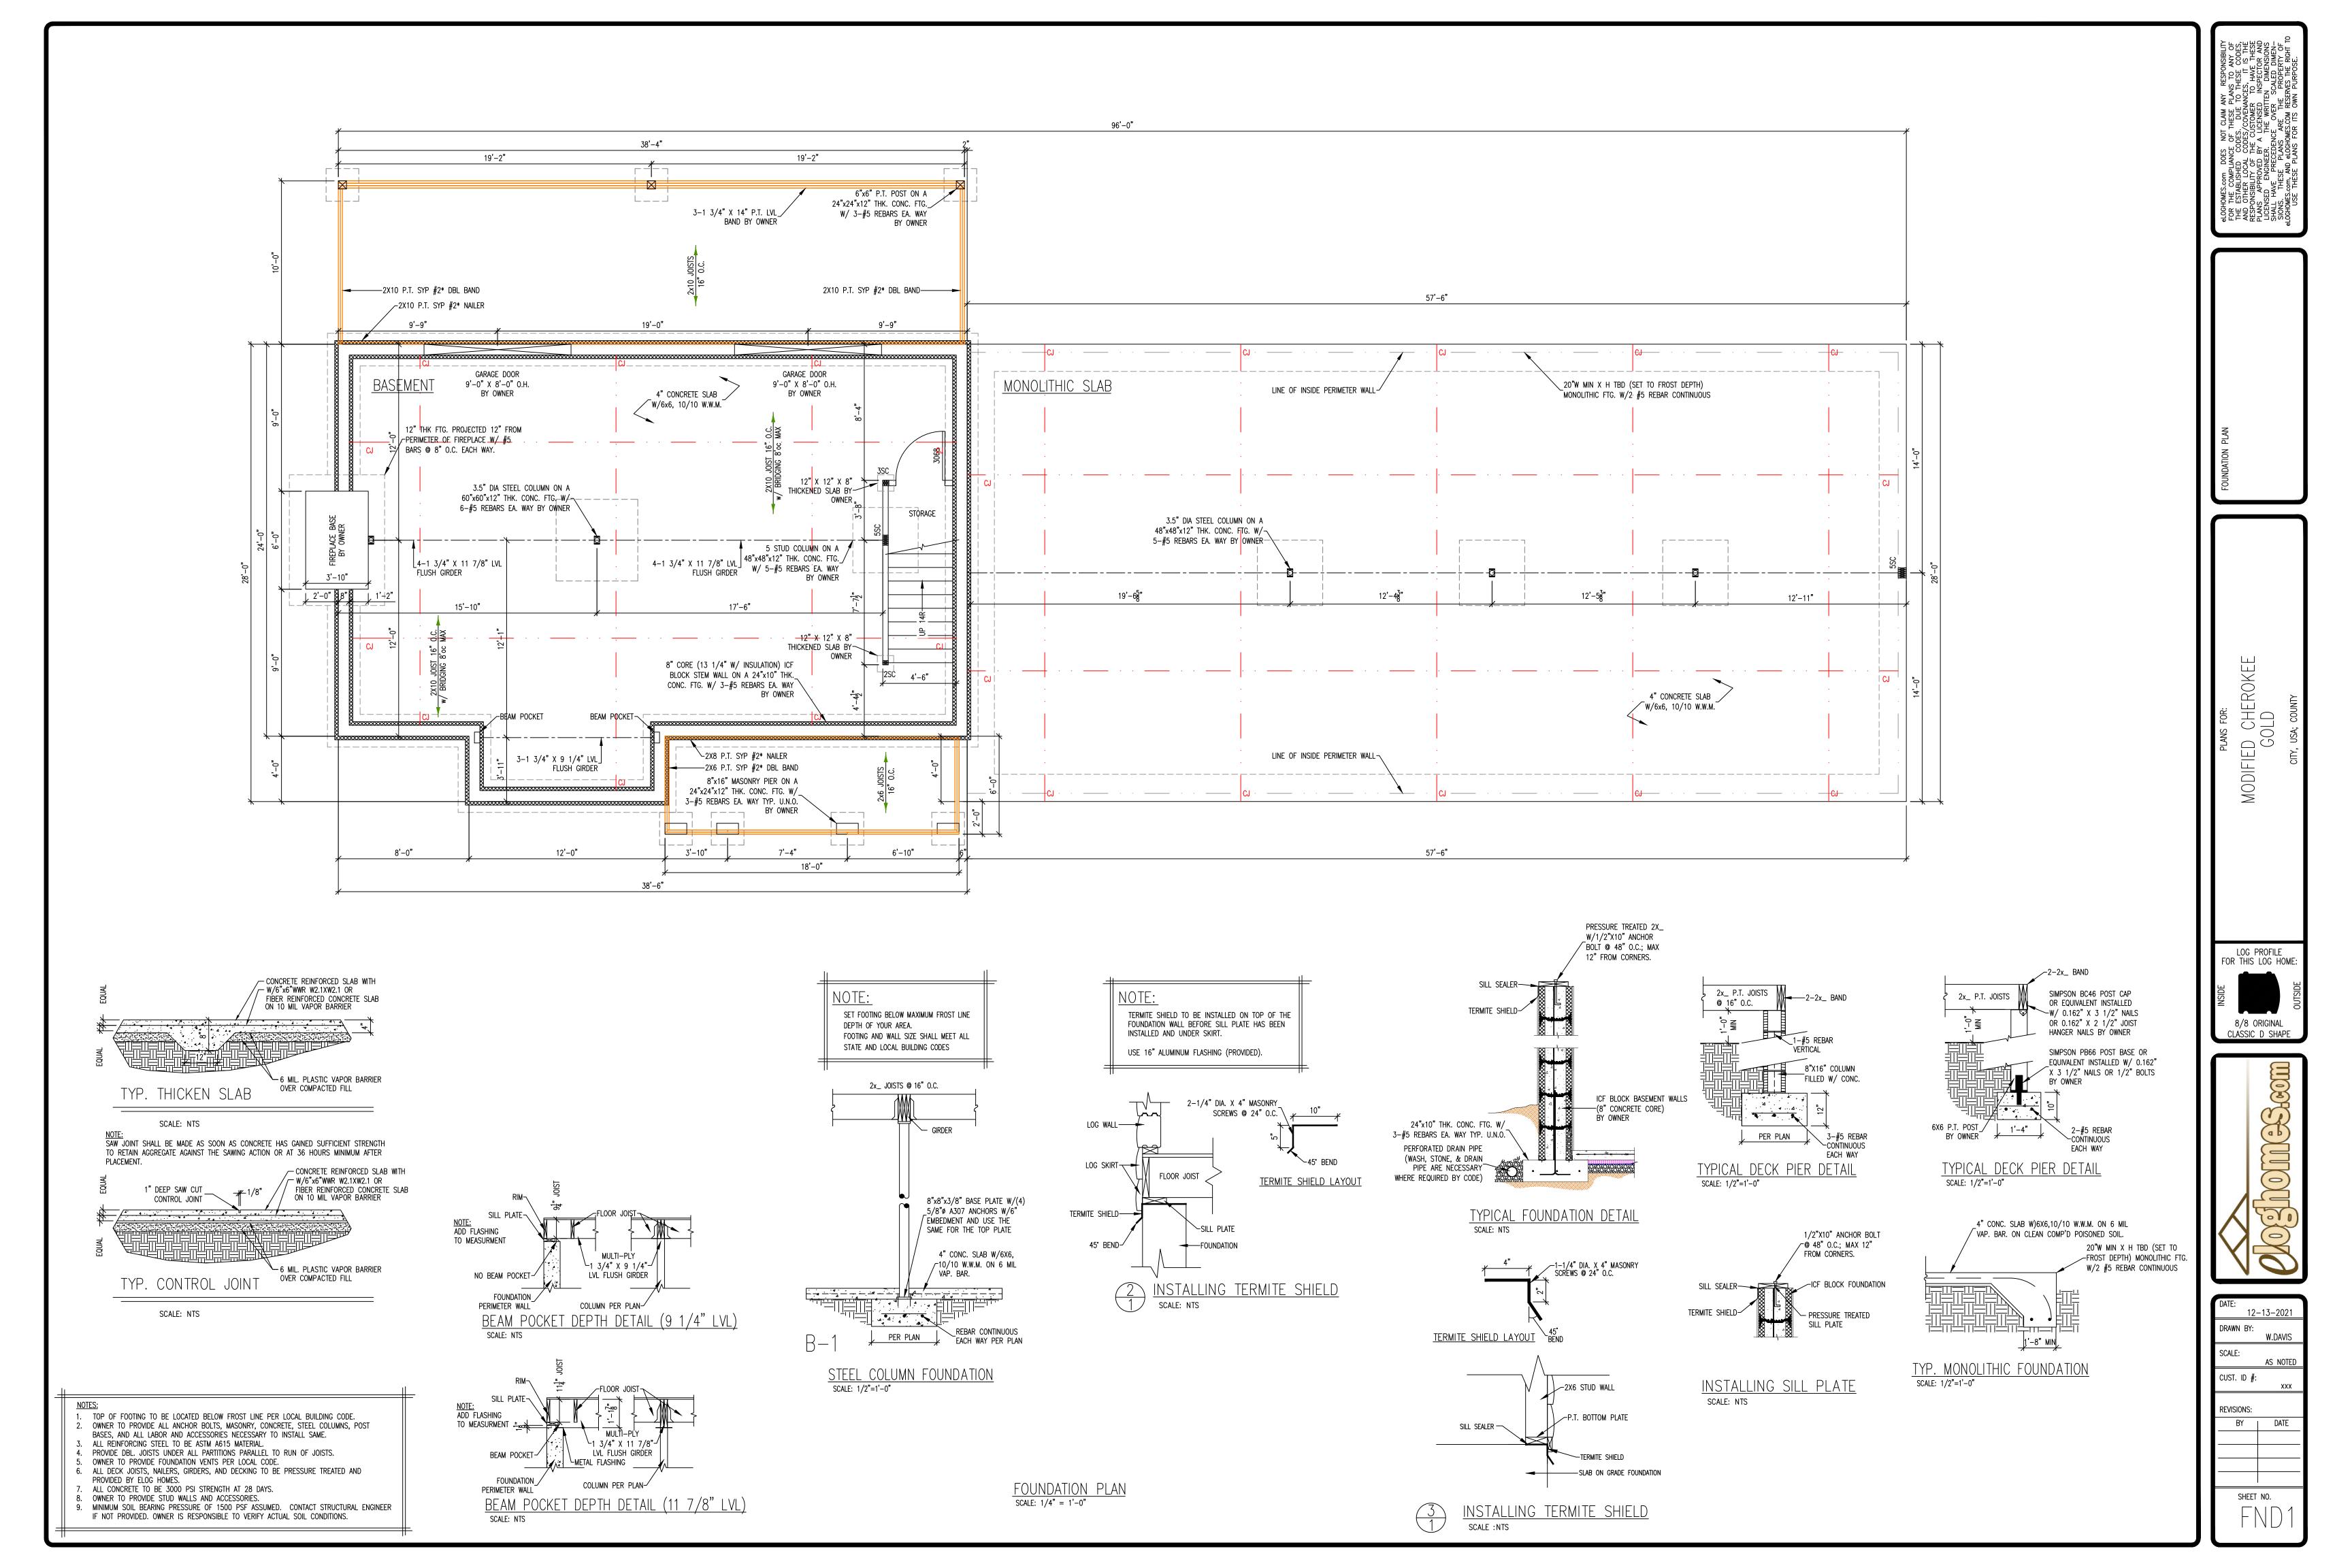

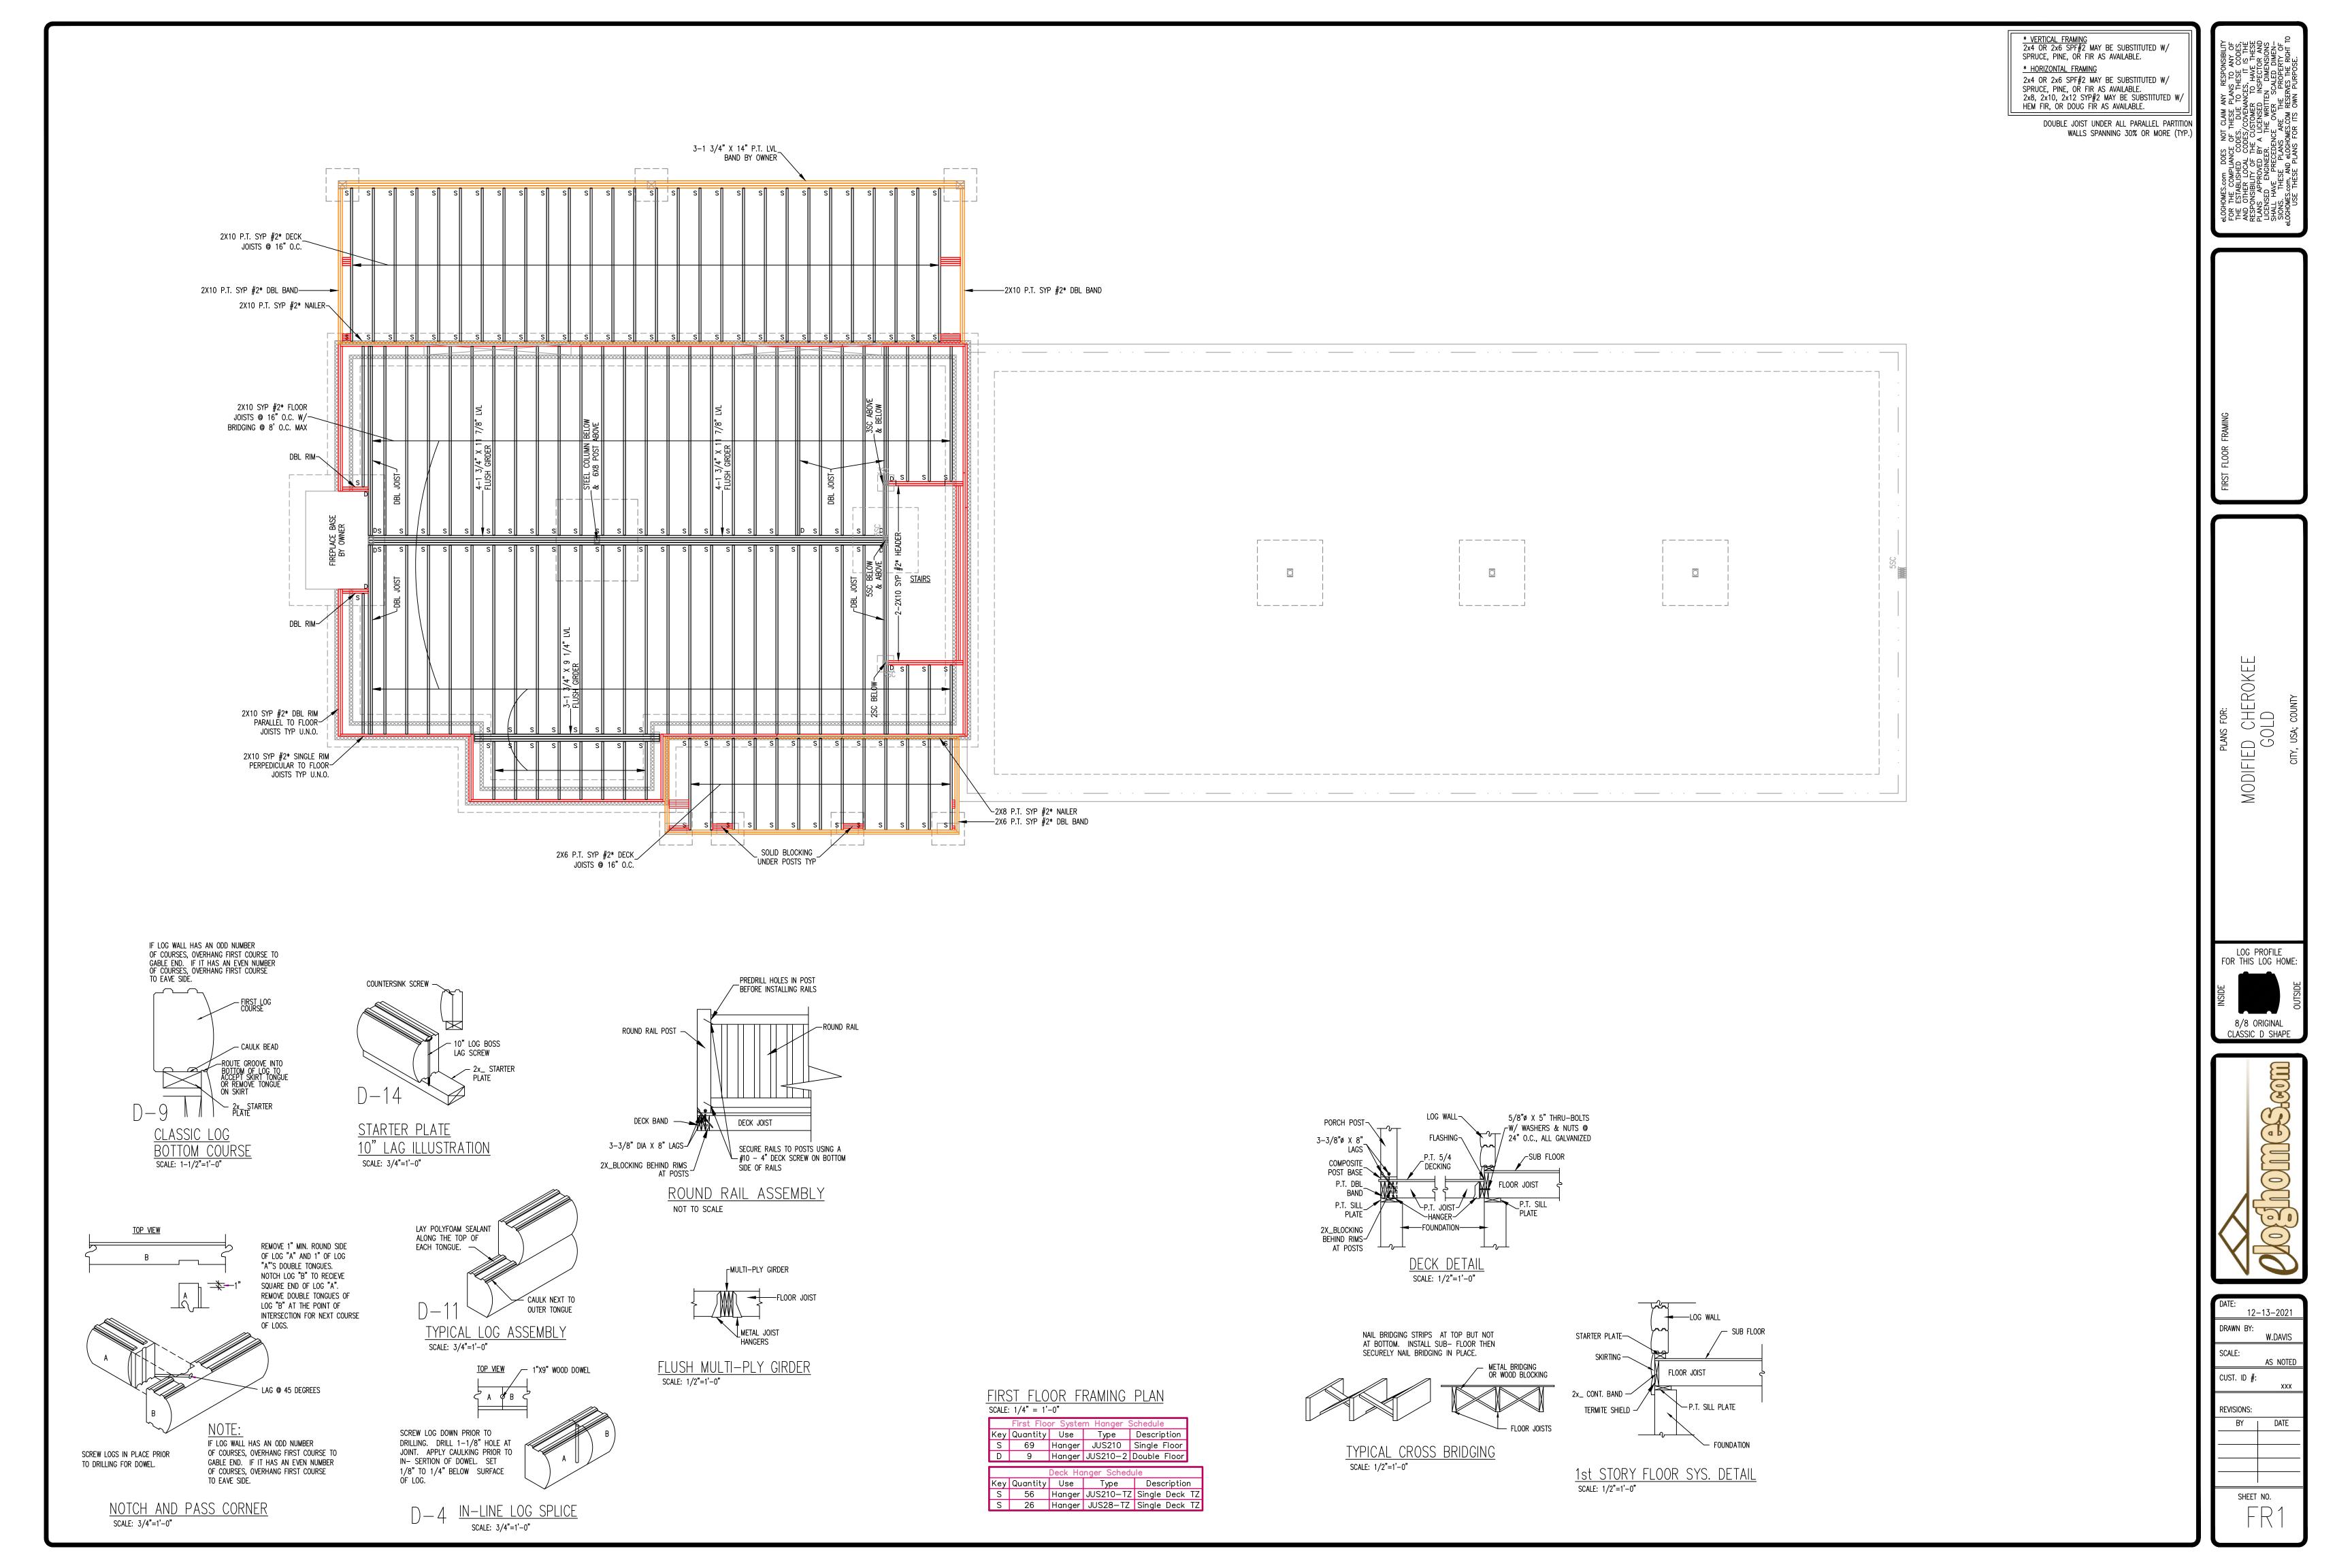

* VERTICAL FRAMING 2x4 OR 2x6 SPF#2 MAY BE SUBSTITUTED W/ SPRUCE, PINE, OR FIR AS AVAILABLE. * HORIZONTAL FRAMING

2x4 OR 2x6 SPF#2 MAY BE SUBSTITUTED W/
SPRUCE, PINE, OR FIR AS AVAILABLE.


2x8, 2x10, 2x12 SYP#2 MAY BE SUBSTITUTED W/
HEM FIR, OR DOUG FIR AS AVAILABLE. DOUBLE JOIST UNDER ALL PARALLEL PARTITION WALLS SPANNING 30% OR MORE (TYP.) 2X10 SYP #2* FLOOR JOISTS @ 16" O.C. W/— BRIDGING @ 8' O.C. MAX 2X10 SYP #2* FLOOR JOISTS @ 16" O.C. W/ BRIDGING @ 8' O.C. MAX 2-1 3/4" X 11 7/8" LVL_ FLUSH GIRDER (NEST IN LOG WALL) 4SC ABOVE ---<u>STAIRS</u> 2X10 SYP #2* DBL RIM PARALLEL TO FLOOR JOISTS TYP U.N.O. 2X10 SYP #2* SINGLE RIM PERPEDICULAR TO FLOOR-JOISTS TYP U.N.O. 2-1 3/4" X 14" LVL_/ DROPPED GIRDER 2X8 SYP #2* CEILING / @ 24" O.C. L8X8 CARRY BEAM TYP L_{1-2X4} SPF #2* NAILER L8"-12" HC KING POST ABOVE L8X8 CARRY BEAM TYP 2X4 SPF #2* CEILING_/ @ 24" O.C. 8/8 ORIGINAL CLASSIC D SHAPE TYVEK HOME WRAP7 SHEATHING + SOLE PLATE— LOG SIDING~ FLOOR JOIST LOG WALL 2X_ CONT. BAND SECOND FLOOR FRAMING PLAN

SCALE: 1/4" = 1'-0" KeyQuantityUseTypeDescriptionS132HangerJUS210Single FloorD10HangerJUS210-2Double FloorTHDH6102HangerTHDH610Triple LVL


KeyQuantityUseTypeDescriptionS30HangerJUS24Single Ceiling

2nd STORY FLOOR FRAMING DETAIL SCALE: 1/2"=1'-0"

MODIFIED CHEROKEE GOLD

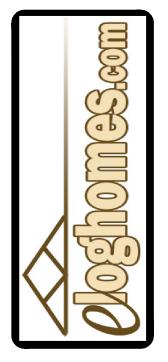


DATE:	-13-2021
DRAWN BY:	W.DAVIS
SCALE:	AS NOTED
CUST. ID #:	xxx
REVISIONS:	
BY	DATE

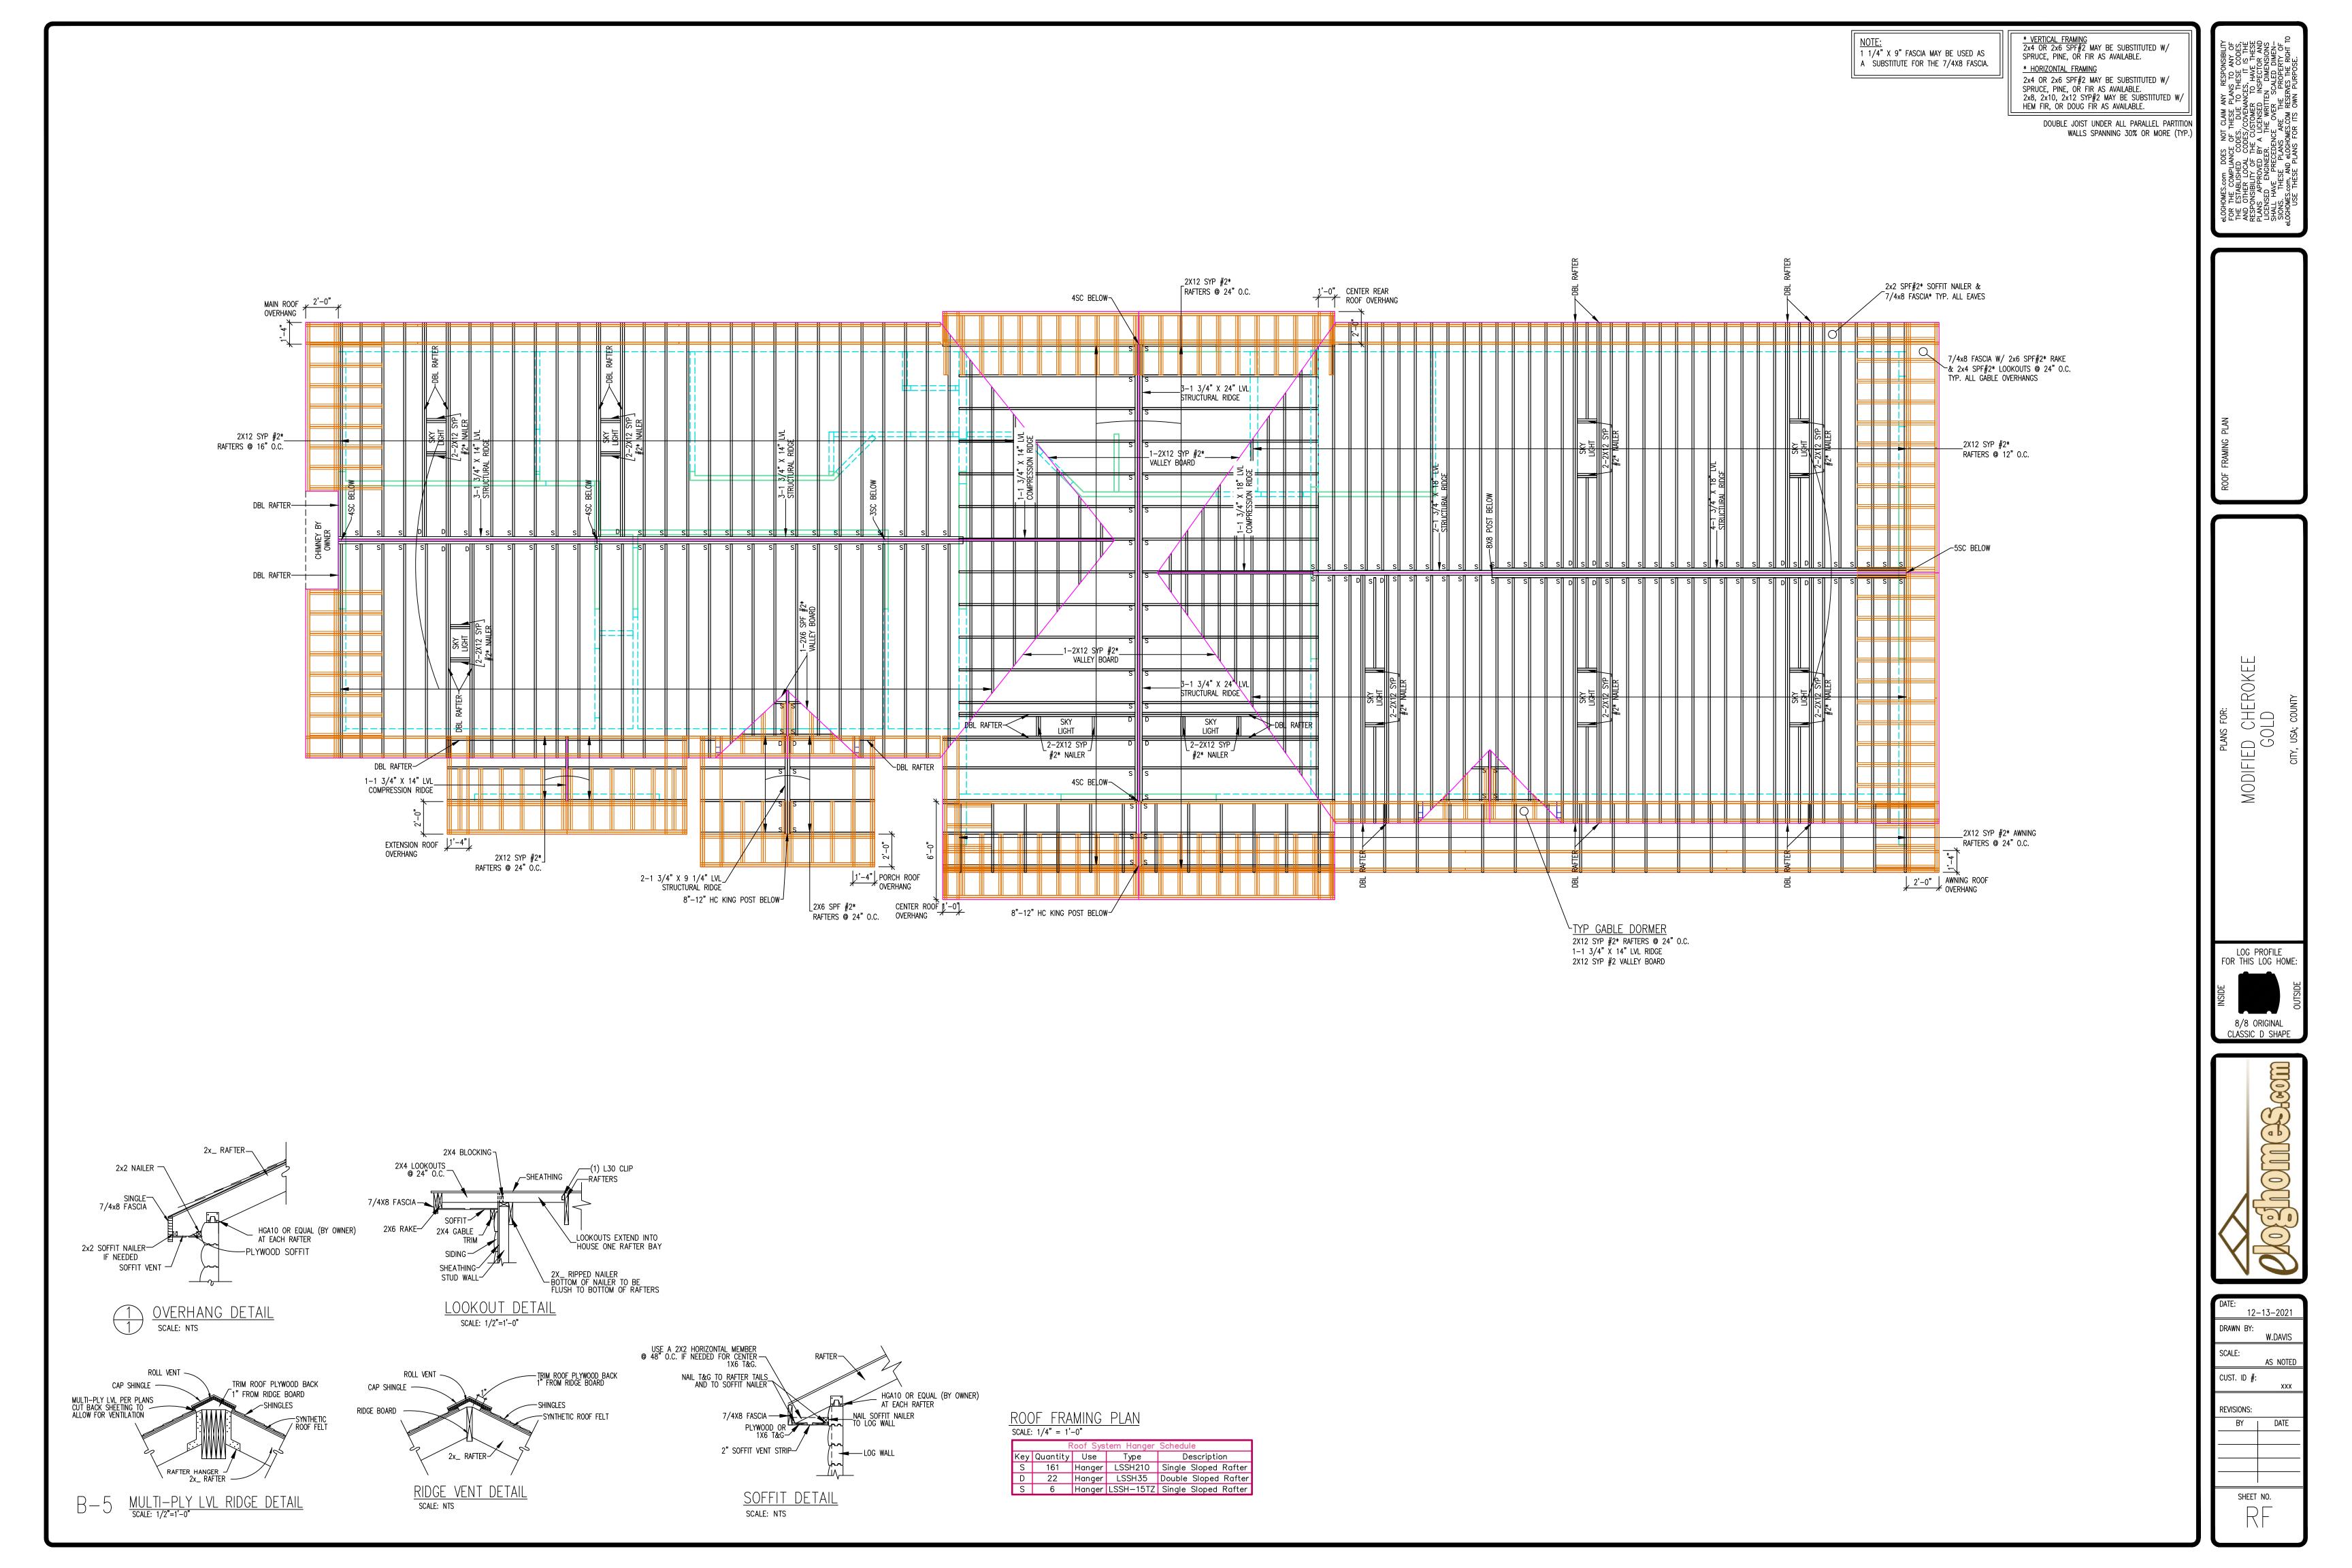


CONSTRUCTION NOTES

- 1. FIELD VERIFY ALL DIMENSIONS AND MATERIALS. ALL OUTSIDE DIMENSIONS ARE TO FACE OF RIM JOIST.
- 2. ALL NAILING CONSTRUCTION MATERIALS SHALL BE AS PER 2018 IRC.
- 3. CONTRACTOR SHALL CALL ATTENTION TO THE OWNER ANY DISCREPANCIES IN DRAWINGS AND/OR SPECIFICATIONS AND SHALL RECEIVE PROPER INSTRUCTIONS BEFORE PROCEEDING WITH THE PORTION OF THE WORK IN QUESTION.
- 4. ROOF AND FLOOR FRAMING PLANS ARE FOR GENERAL INFORMATION ONLY. THE TRUSS MANUFACTURER SHALL PROVIDE A DETAILED LAYOUT FOR TRUSS AND FRAMING MEMBERS.
- 5. SHOULD CONDITIONS AT THE SITE BE FOUND TO BE MATERIALLY DIFFERENT FROM THOSE INDICATED IN THE DRAWINGS AND/OR SPECIFICATIONS, OR CONDITIONS OF AN UNUSUAL NATURE ARE DISCLOSED MATERIALLY DIFFERENT FROM THE CONDITIONS USUALLY INHERENT IN THE WORK OF THE CHARACTER SHOWN AND SPECIFIED; CALL IMMEDIATE ATTENTION TO SUCH CONDITIONS BEFORE THEY ARE DISTURBED.
- 6. DO NOT SCALE DRAWINGS. USE PRINTED DIMENSIONS ONLY.
- 7. DUE TO THE AVAILABILTY OF MATERIALS, E LOG HOMES RESERVES THE RIGHT TO SUBSTITUTE MATERIAL SHOWN ON PLANS FOR A COMMENSURATE MATERIAL WHICH IS IN COMPLIANCE WITH SAFETY AND BUILDING CODE REQUIREMENTS.
- 8. THESE DETAIL SHEETS CONTAIN INFORMATION WHICH IS IMPERATIVE TO THE PROPER AND TIMELY CONSTRUCTION OF YOUR HOUSE.
- 9. STANDARD MEANS AND METHODS OF CONSTRUCTION SHOULD BE INCORPERATED INTO ALL WORK WITH SPECIAL ATTENTION GIVEN TO SAFETY.
- 10. COORDINATE INSULATION & ENERGY REQUIREMENTS WITH LOCAL BUILDING CODE FOR COMPLIANCE.
- BE SURE THE CONTRACTOR RECEIVES THIS INFORMATION!!

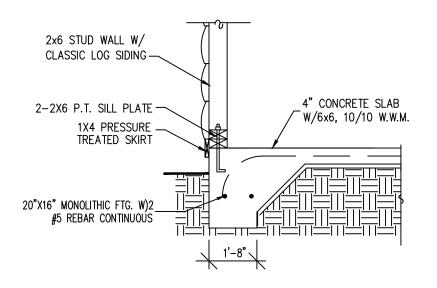

TYPICAL WALL SECTION

1 NOT TO SCALE

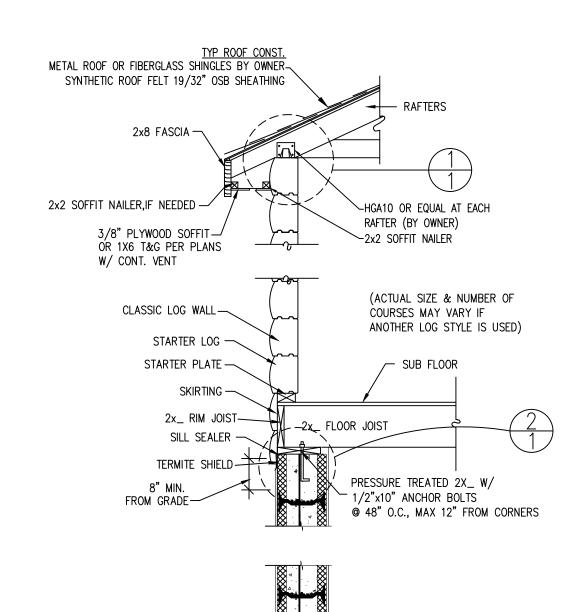

TYPICAL WALL SECTION

24"x10" THK. CONC. FTG. W/

PIPE ARE NECESSARY
WHERE REQUIRED BY CODE)

3-#5 REBARS EA. WAY TYP. U.N.O. \

PERFORATED DRAIN PIPE (WASH, STONE, & DRAIN ICF BLOCK BASEMENT WALLS


4" CONCRETE SLAB


√W/6x6, 10/10 W.W.M.

-(8" CONCRETE CORE)

BY OWNER

- **DESIGN NOTES:** ROOF WAS DESIGNED WITH A SNOW LOAD OF 53 LBS/S.F. & A DEAD LOAD
- OF 10 LBS/S.F.
- WIND SPEED 115, RISK CATEGORY 2, EXPOSURE C FIRST FLOOR WAS DESIGNED WITH A LIVE LOAD OF 40 LBS/S.F. AND DEAD LOAD OF 10 LBS/S.F. SECOND FLOOR SLEEPING AREAS WERE DESIGNED WITH A LIVE LOAD OF 30 LBS/FT2 AND A DEAD LOAD OF 10 LBS/S.F. ALL OTHER SECOND FLOOR AREAS, 40 LBS/S.F. AND A DEAD LOAD OF 10 LBS/S.F.
- 4. ALL FRAMING LUMBER FOR FLOOR AND ROOF SYSTEMS, IS TO BE #2 SYP OR BETTER, UNLESS OTHERWISE NOTED.
- ALL LAMINATED VENEER LUMBER TO BE 2.0E 2950Fb MATERIAL OR
- BETTER, UNLESS OTHERWISE NOTED. RIDGES LABELED "STRUCTURAL" REQUIRE SLOPED HANGERS, WHERE RAFTER
- CONTACTS. THESE HANGERS WILL BE PROVIDED WITH THE PACKAGE. HANGERS WILL <u>NOT</u> BE PROVIDED FOR STANDARD COMPRESSION RIDGES. WHERE BEAMS ARE LABELED ON PLAN, DO NOT SPLICE BEAM NOR ANY PLY
- OF BEAM BETWEEN SUPPORTS.
- REFERENCE CURRENT STATE ADOPTED EDITION OF THE IRC OR LOCAL BUILDING CODES FOR ANY INFORMATION NOT SHOWN.

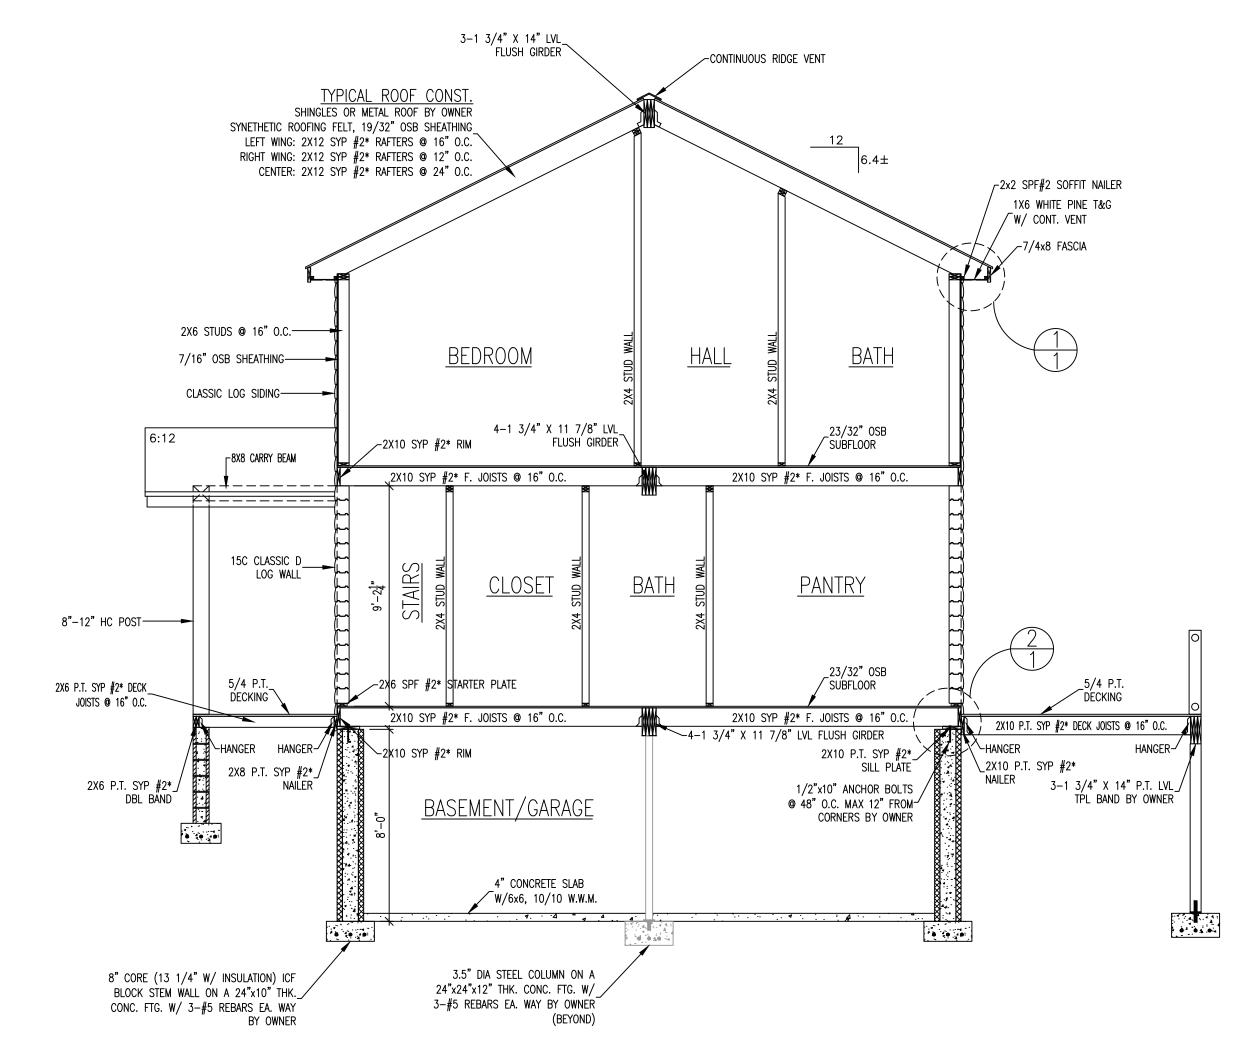

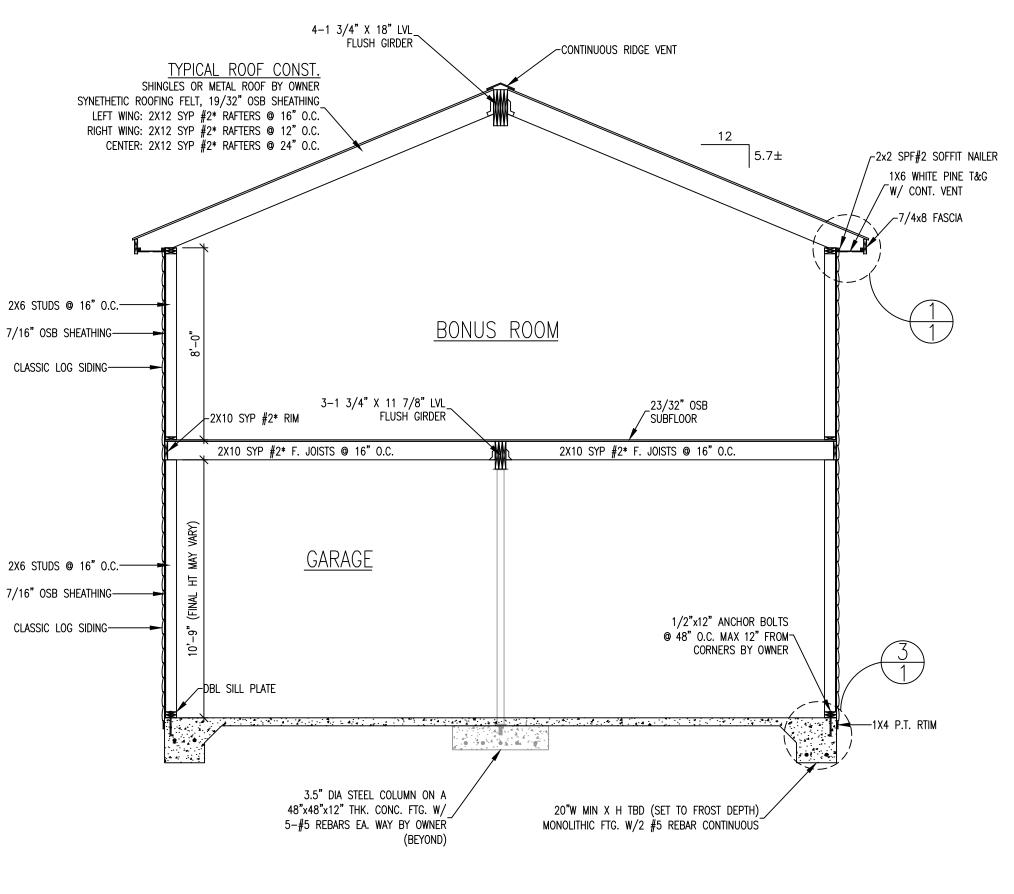







* VERTICAL FRAMING 2x4 OR 2x6 SPF#2 MAY BE SUBSTITUTED W/ SPRUCE, PINE, OR FIR AS AVAILABLE. * HORIZONTAL FRAMING 2x4 OR 2x6 SPF#2 MAY BE SUBSTITUTED W/ SPRUCE, PINE, OR FIR AS AVAILABLE. 2x8, 2x10, 2x12 SYP#2 MAY BE SUBSTITUTED W, HEM FIR, OR DOUG FIR AS AVAILABLE. DOUBLE JOIST UNDER ALL PARALLEL PARTITION WALLS SPANNING 30% OR MORE (TYP.)

1 1/4" X 9" FASCIA MAY BE USED AS

A SUBSTITUTE FOR THE 7/4X8 FASCIA.





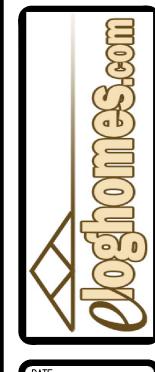

DRAWN BY: W.DAVIS SCALE: REVISIONS: BY | DATE

